


Sport In The Box Support

Vidensbase > Combined Output > How to create simple animation with Combined output

How to create simple animation with Combined output

Dmitri Peredera - 2023-10-20 - Kommentarer (0) - Combined Output


How to create simple animation with Combined output

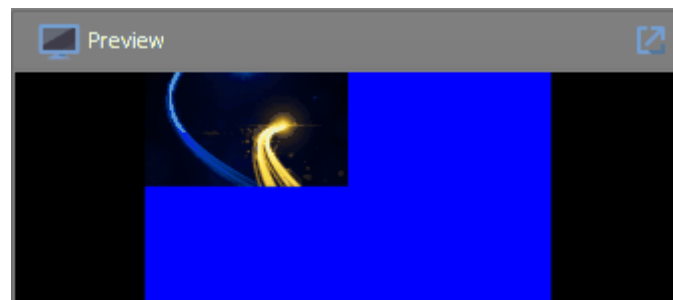

This KB explains how to create a simple animation of one source with CombinedOutput.

Preparation



Create empty database with desired sport and add one or more video files to playlist.

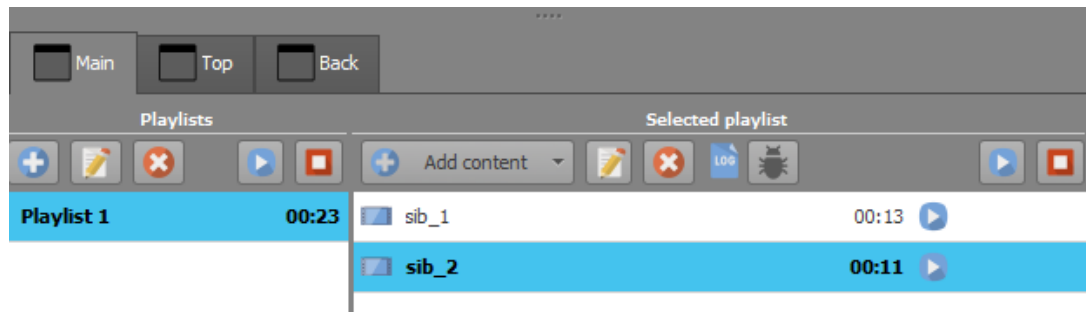

Make file loop and start playlist.


Configure CombinedOutput

Go to the settings menu and select CombinedOutput (license restrictions may apply).

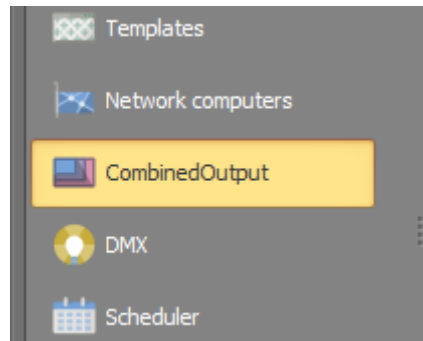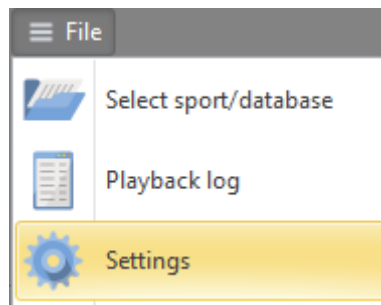

By default, combined output is disabled, enable it and leave video format as it is.

For demonstration purpose, write *blue* in background color.

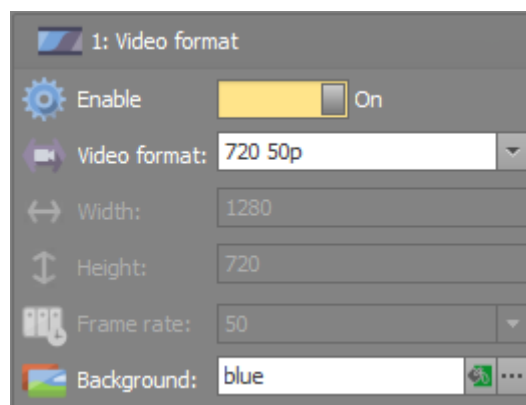


Create views and layer

CombinedOutput is mostly used to compose and animate different elements like *ScreenController*.

For simple composition of up to three elements show at the same time, *ScreenController* with three layers may be enough.


Create element by pressing *add* button. Element name can be changed by clicking on it's name and typing.

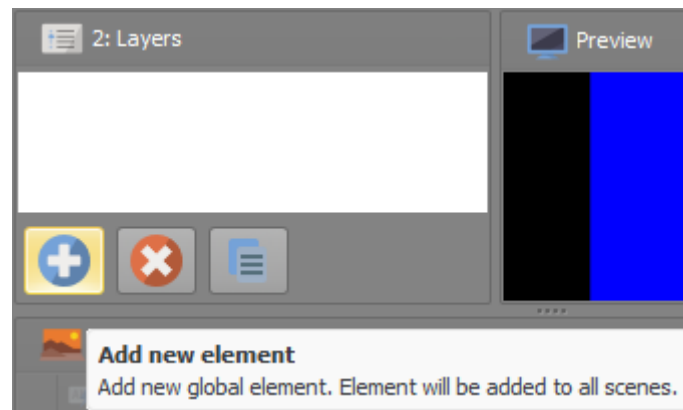


Each element will exist on all new scenes and can be customized individually.

Go to the scenes

!6_empty_scenes.png

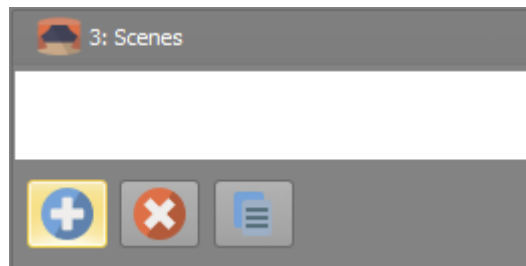

And add two scenes

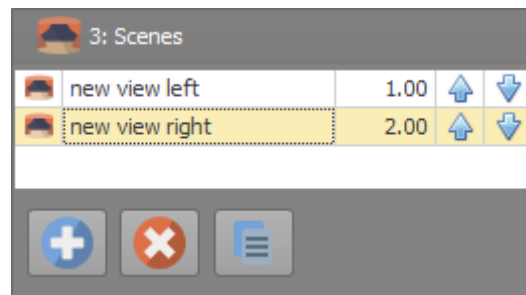


name those *new view left* and *new view right* or any other name.

Change transition time by clicking in cell and typing or using the numeric editor inside the cell.

Active scene is changed with the transition time by clicking on it.


In the runtime, scene is usually changed with *QuickButton*.

Try changing scene and look at the property editor. It should look like that:

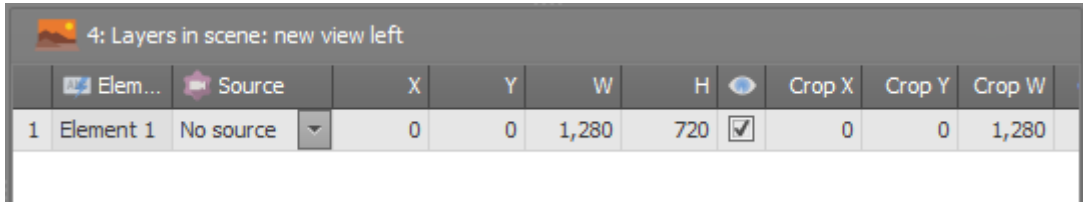

The screenshot shows a table with 11 columns: 'Elem...', 'Source', 'X', 'Y', 'W', 'H', a visibility icon, 'Crop X', 'Crop Y', and 'Crop W'. The first row contains the following data: '1', 'Element 1', 'No source', '0', '0', '1,280', '720', a checked checkbox, '0', '0', and '1,280'.

	Elem...	Source	X	Y	W	H		Crop X	Crop Y	Crop W
1	Element 1	No source	0	0	1,280	720	<input checked="" type="checkbox"/>	0	0	1,280

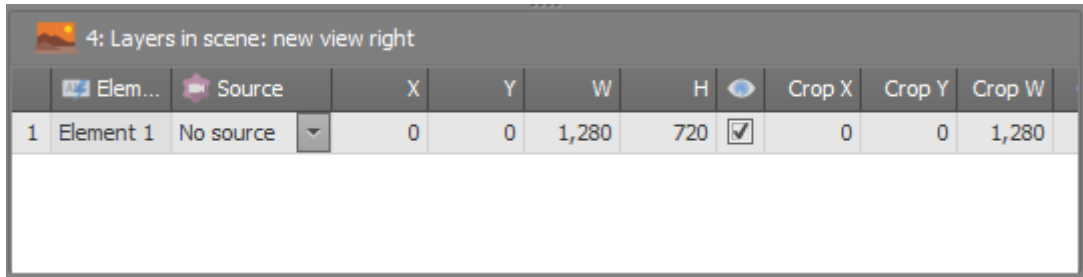

The screenshot shows a table with 11 columns: 'Elem...', 'Source', 'X', 'Y', 'W', 'H', a visibility icon, 'Crop X', 'Crop Y', and 'Crop W'. The first row contains the following data: '1', 'Element 1', 'No source', '0', '0', '1,280', '720', a checked checkbox, '0', '0', and '1,280'.

	Elem...	Source	X	Y	W	H		Crop X	Crop Y	Crop W
1	Element 1	No source	0	0	1,280	720	<input checked="" type="checkbox"/>	0	0	1,280

Change the source of both layers to *Main*.

When the source is changed, width and height is changed to the source values.


At this point, both elements should show file playing at full screen.

Change elements

Change element values by editing those either in property panel or by clicking on layer cell, mouse scroll also works.


Left scene

Change `_width_` and `_height_` of left source to 640 and 360.

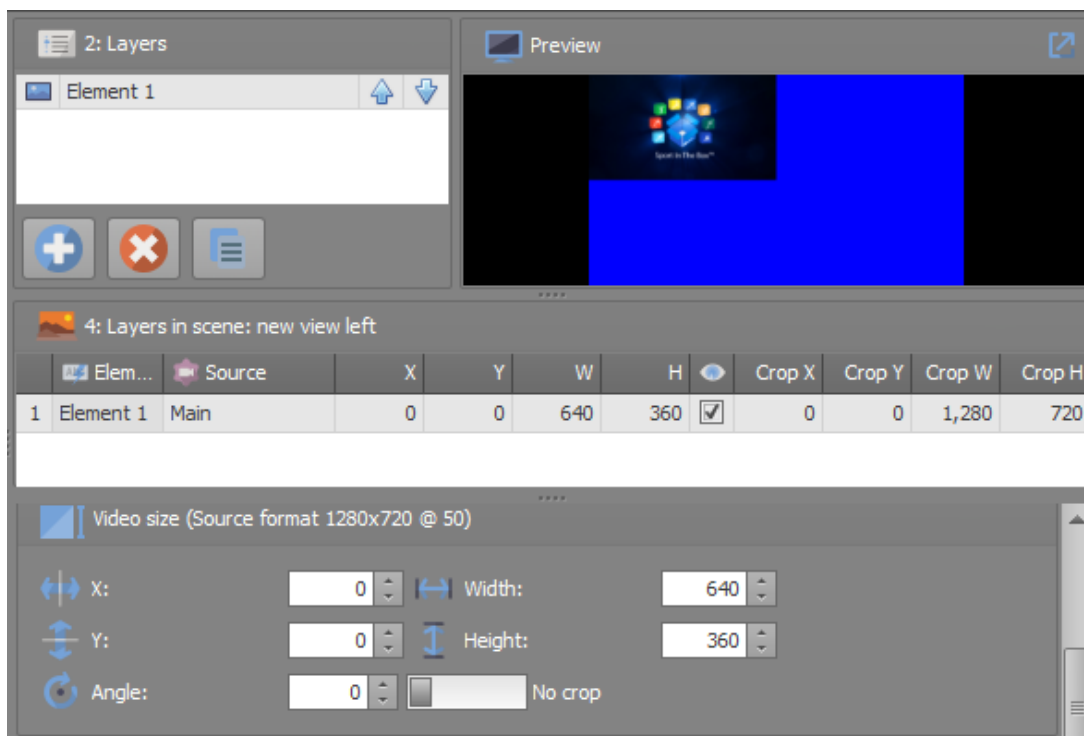


Right scene

Change `_width_` and `_height_` of left source to 640 and 360. Change `_x_` to 640.

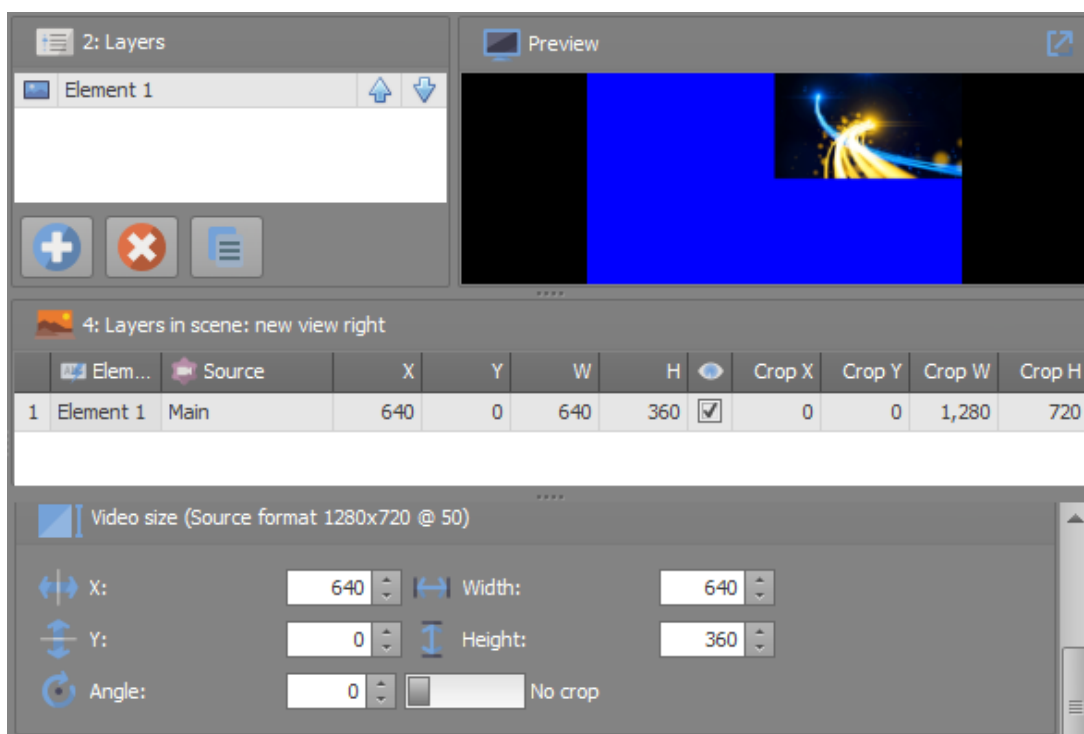


Press scene names and adjust animation time if needed.

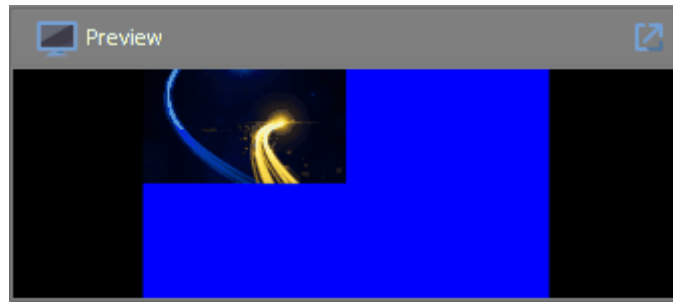


Configure quickButtons


Close settings and create two *QuickButtons*

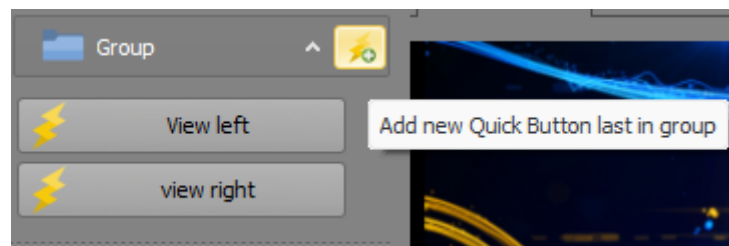

Edit buttons to activate *left* or *right* scene.

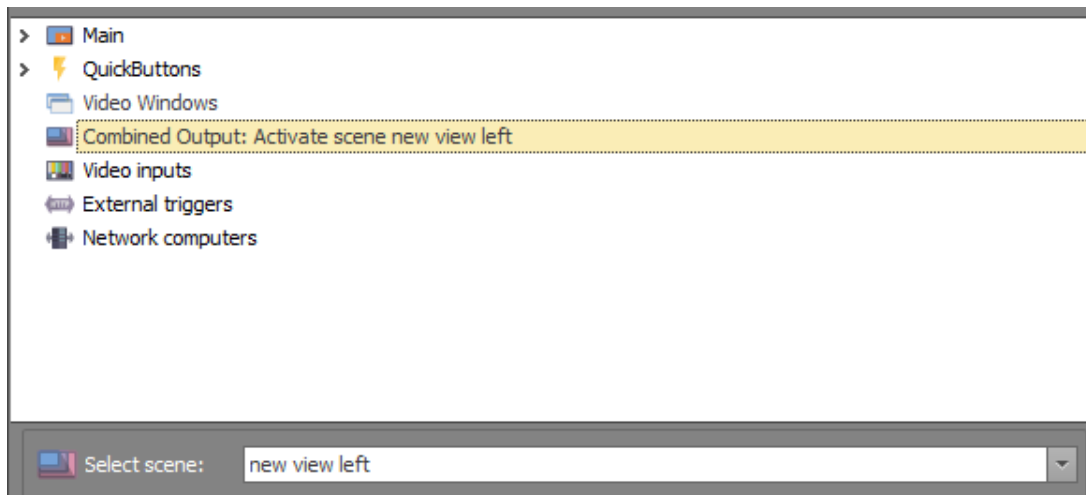

Press *right mouse button* on main preview area and select *Combined Output* as preview source.

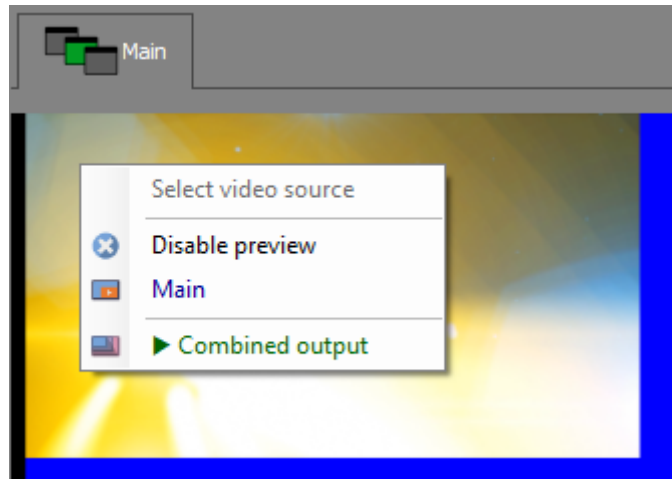

Press *QuickButtons* to change the current scene and perform the animation.

